RAVENOL®

USVO®

Ultra Strong Viscosity Oil

Why does RAVENOL offers two quality grades with similar or comparable approvals/ specifications?

Manufacturer specifications such as VW 504 00 / 507 00 cover a variety of aggregates in many different vehicle types, such as a 1.4L TDI in the Volkswagen Polo V, a 3.0L TDI in the Audi Q7 through to the Audi RS6 5.0 TFSI quattro.

The manufacturer specifications can only ever cover a minimum requirement for average use, but not different driving styles and areas of usage and the resulting strains. An AUDI RS6 with over 500 hp is generally driven in a different way to a Volkswagen 1.4L Polo. The lubricants used in such vehicles are therefore also subject to greater levels of strain, for example as a result of shear forces and higher operating temperatures.

In order to offer both groups of customers a product which is tailored to their requirements, RAVENOL offers OEM-grade and USVO-grade products and the latter significantly exceed manufacturer specifications.

RAVENOL®

USVO®

Ultra Strong Viscosity Oil

Better engine protection

Improved performance

Optimal engine cleanliness

Extended oil change intervals

USVO®
Ultra Strong Viscosity Oil

OEM QUALITY

RAVENOL VMP 5W-30
Art. 1111122

APPROVAL/SPECIFICATIONS

BMW Longlife-04, VW 504 00 / 507 00 (for Europe and Northamerica), MB-Approval 229.51, Porsche C30 (currently valid for PORSCHE Diesel cars, Cayenne V6 and all PORSCHE Hybrid cars), MB 229.31, Fiat 9.55535-S1, Audi/Volkswagen G 052 195 M2, G 052 195 M4, G 052 195 M6, BMW 83 21 0 398 507, BMW/Mini 83 21 0 398 508, Mercedes Benz 000 989 89 01 10, Chrysler MS-11116, Audi Motorsport V31 748 026

RAVENOL SMP 5W-30
Art. 1111126

RAVENOL DXG 5W-30
Art. 1111124

APPROVAL/SPECIFICATIONS

ILSAC GF-5, Resource Conserving, GM dexos1™ Gen 2, Ford WSS-M2C946-A, Ford WSS-M2C929-A, Chrysler MS-6395, Honda/Acura HTO-06

RAVENOL HDX 5W-30
Art. 1111125

RAVENOL VST 5W-40
Art. 1111136

APPROVAL/SPECIFICATIONS

MB 229.5, Porsche A40, VW 502 00 / 505 00, BMW Longlife-01, Opel GM-LL-B-025, Renault RN0700 / RN0710, Chrysler MS-12991 (replace MS-10896), MS-10850, MS-10725 (Fiat 9.55535-GH2 and Fiat 9.55535-Z2)

RAVENOL HST 5W-40
Art. 1111103

MADE IN GERMANY
SINCE 1946

RAVENOL®

WWW.RAVENOL.DE

USVO®

Ultra Strong Viscosity Oil

OEM QUALITY

RAVENOL SFE 5W-20

Art. 1111110

APPROVAL/SPECIFICATIONS

ILSAC GF-5, FORD WSS-M2C930-A, FORD WSS-M2C930-B (extended drain capability), Ford WSS-M2C925-A/B, Ford WSS-M2C948-B, Chrysler MS-6395, Honda/Acura HTO-6, Nissan, Mazda, Suzuki, Toyota, Fiat 9.55535-CR1, JaguarLand Rover STJLR.03.5004

RAVENOL VFE 5W-20

Art. 1111311

RAVENOL ECS 0W-20

Art. 1111102

APPROVAL/SPECIFICATIONS

ILSAC GF-5, Resource Conserving, Ford WSS-M2C947-A, GM 6094M, Honda/Acura HTO-6, Chrysler MS-6395, Mitsubishi, Nissan, Mazda, Suzuki, Toyota, Jaguar Land Rover STJLR.51.5122

RAVENOL EHS 0W-20

Art. 1111113

RAVENOL FDS 5W-30

Art. 1111139

APPROVAL/SPECIFICATIONS

Renault RN0700, FORD WSS-M2C913-D (replace FORD WSS-M2C913-A/B/C), Fiat 9.55535-G1, JAGUAR LAND ROVER STJLR.03.5003

RAVENOL FO 5W-30

Art. 1111115

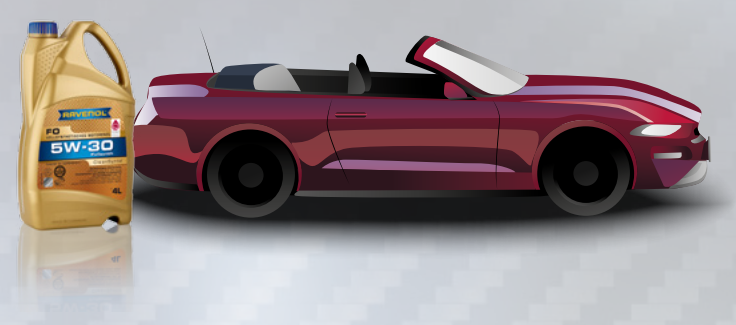

MADE IN GERMANY SINCE 1946

RAVENOL®

WWW.RAVENOL.DE